


PCIe 4.0 Retimer


Introduction

Montage Technology provides high-performance, 8-lane and 16-lane PCIe 4.0 retimers with advanced signal conditioning capabilities to secure system reliability and scalability. These retimers are compliant with PCIe Base Specification 4.0 and support mainstream package requirements, offering a robust and scalable PCIe interconnect solution for servers, enterprise storage, heterogeneous computing and communication systems. These retimers have industry-leading performance in terms of power consumption, latency, etc. and have completed comprehensive interoperability tests with various devices including CPU, network card, SSD, GPU and PCIe switch.

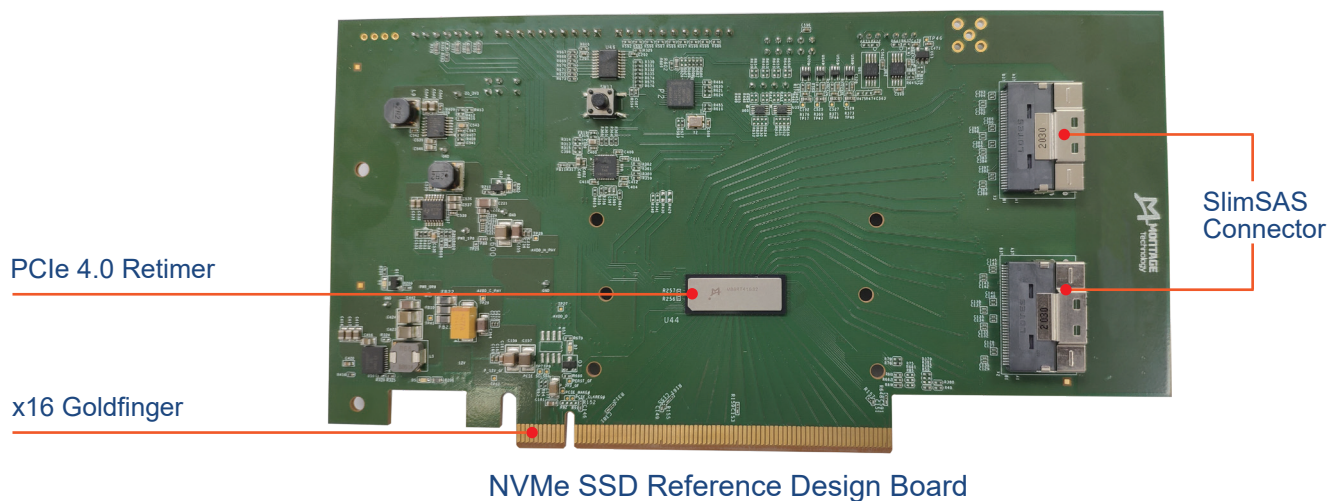

Typical Applications

- Servers
- Storage appliances
- Communication equipments
- Hardware accelerators

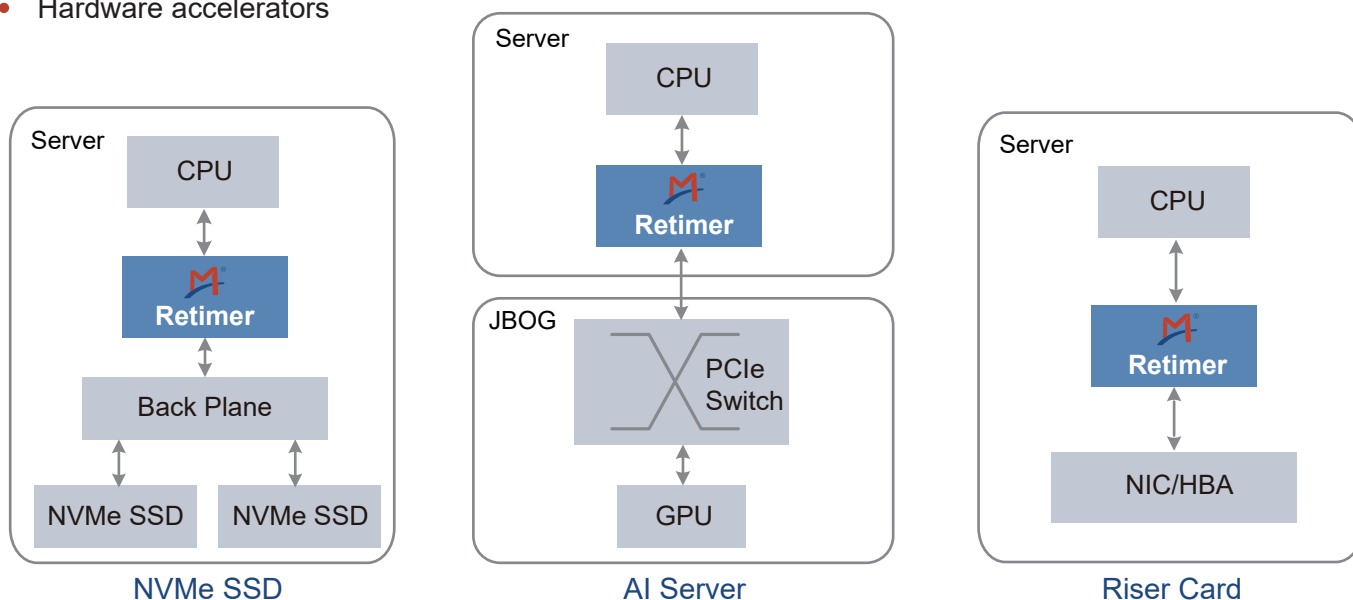

Features

High-performance PCIe 4.0 x8/x16 Retimers

- High-performance 16 GT/s SerDes, capable of compensating for channel loss up to 28 dB
- Eliminate deterministic input jitter and random input jitter
- Support lane polarity inversion
- Support hot plug
- Low power and low latency

PCIe Standards and Compatibility

- Compliant with PCIe 4.0 Base Specification, backward compliant with PCIe 3.0 and below
- Support mainstream package requirements

Power Management

- Support PCIe L1PM feature
- Powered by 1.8 V and 0.8 V

Clocking

- Use standard 100 MHz reference clock
- Support Common Clock, SRNS and SRIS
- Support 100 MHz reference clock output

Reliability, Availability and Maintainability


- IEEE 1149.6 AC-JTAG Boundary Scan
- Support Rx margining test and slave loop-back
- Support multiple DFX features for convenient system bring-up and test
- Device configuration via SMBus or EEPROM
- Provide Lane/Port error diagnosis register
- Provide internal registers for system use

Ordering Information

Part Number	Specification	Configurability	Max. Data Rate	Number of Lanes	Package
M88RT40816	PCIe 4.0	EEPROM I ² C	16 GT/s	8	13.4 mm x 8.5 mm, 332-ball FCCSP
M88RT41632	PCIe 4.0	EEPROM I ² C	16 GT/s	16	22.8 mm x 8.9 mm, 354-ball FCCSP

Evaluation Board and Kit

Evaluation Board

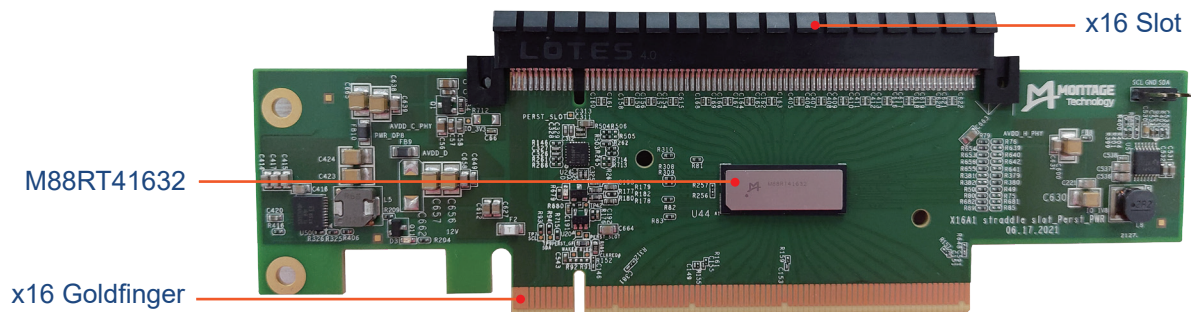

Debugging Tool

